

LINGYU凌宇

—COMPRESSED AIR SYSTEM—
ZHONGSHAN LINGYU MACHINERY CO., LTD.



>Main Product:

- Air cooled/water cooled /energy-saving refrigerated dryer
- Heatless regeneration / heated regeneration / modular adsorption dryer
- Zero loss/micro air consumption adsorption dryer
- PSA nitrogen generator
- Filter and accessories

Corporate mission:

To provide professional, comprehensive and competitive complete solutions and services for industrial gas separation and purification

Corporate vision:

To be a leading enterprise in the industry and create a world-renowned brand

Corporate development philosophy:

Technology-supported value-driven

Marketing strategy:

To win the market with high-quality products and professional service

M SERIES

LOW ENERGY CONSUMPTION MODULAR ADSORPTION AIR

DRYER ■ Design Features

Energy saving, regeneration gas consumption is 5%

**~8%; The compressed air contact surface has been
oxidized and anti-rust treated to effectively.**


Stable performance, selected high-quality adsorbents;

Economical and affordable, a full-flow standby machine can be

realized at a low cost, and the maintenance cost is low;

prevent secondary pollution of the finished gas. It is especially suitable
for the food and pharmaceutical industry and has a service life of up to
30 years;

The overall structure is exquisite and made of aviation magnesium-
aluminum extrusion alloy. It can enter and exit standard doors and is
widely used in
various venues.

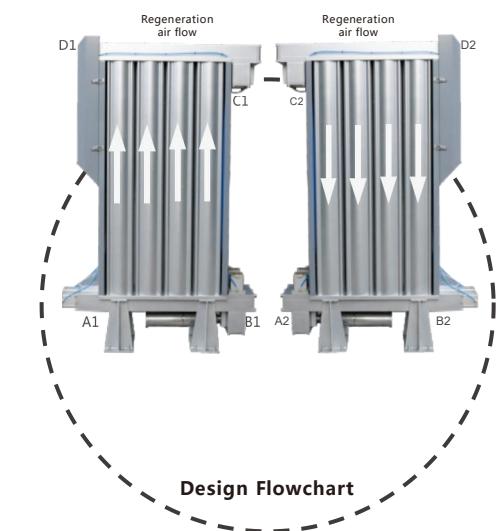

■ Technical Parameters

Model	Capacity (m³/min)	Connection size	Weight (Kg)	Voltage (V/ Hz)	Dimension(L*W*H)
LY-M10N X	1.5	G1"	35	220/50	460×300×752
LY-M20N X	2.5	G1"	60	220/50	460×300×1246
LY-M30N X	3.8	G1"	70	220/50	460×300×1546
LY-M50N X	6.5	G1-2"	190	220/50	400×778×1735
LY-M70N X	10.5	G2"	285	220/50	400×952×1735
LY-M100N X	13.5	G2-12"	375	220/50	400×1126×1735
LY-M120N X	17	G2-2"	470	220/50	400×1300×1735
LY-M150N X	21.5	G2-2"	565	220/50	400×1474×1735
LY-M180N X	25	G2-12"	660	220/50	400×1648×1735
LY-M200N X	28.5	DN80	755	220/50	762×1126×1760
LY-M300N X	37	DN100	940	220/50	762×1300×1760

LY-M350N X	41.5	DN100	1130	220/50	762×1474×1760
LY-M450N X	50	DN100	1320	220/50	762×1648×1760
LY-M500N X	55	DN125	1510	220/50	762×1884×1760

Note: If the air volume is greater than **55m³/min** or special specifications, materials, or temperature requirements are required, please contact our company or dealer for technical information. The above data is for reference only and is subject to change without prior notice. For other specifications, please contact our company directly.

OUR SERVICES

■ LINGYU Services




**Professional
efficient**



**Strive to improve
customer satisfaction**



**National coverage
fast response**

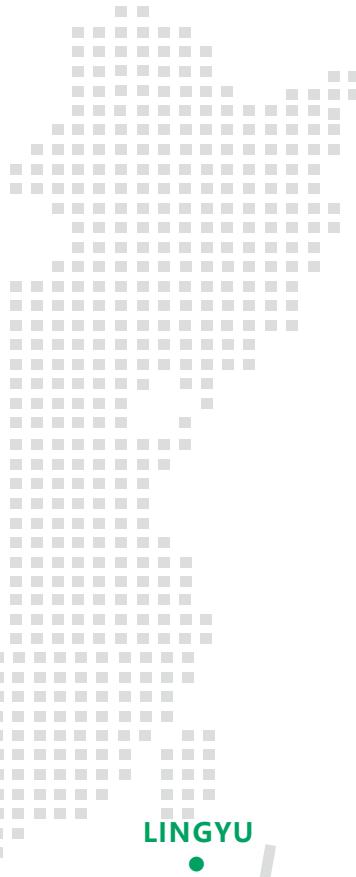

■ Service Content

- **Provide free after-sales consultation;**
- Debug, repair, and maintenance of Lingyu equipment during the warranty period;
- Survey the site of other brands outside the warranty period of Lingyu and formulate plans.

■ Complete Accessories

- **Refrigerated air dryer**

Fans, compressors, condensers, evaporators, dry filters, expansion valves, bypass valves, pressure gauges, various drains, etc.



○ **Adsorption air Dryers**

Valves, electrical boxes, adsorbents, diffusers, silencers, solenoid valves, check valves, etc.

○ **Other accessories**

Various filter elements, differential pressure gauges, etc.



CONTACT US

-  Address: No.3 , 2nd Street , Yuanle Road , DongshengTown , Zhongshan City , Guangdong Province , China
-  E-mail: lingyudryer@gmail.com
-  Website: www.lingyuair.com/